ASSEMBLY INSTRUCTIONS FOR OUTDOOR SAILS

1. Insert the spikes in the distances given in figure (B)
2. Spread the masts
3. Spread the sail
4. Attach the upper bracket to the hitch on the mast
5. Apply masts to spikes
6. Tighten the fabric with the mounting pins (A)
   at the distances given in the drawing

TAKE DOWN DURING STRONG STORM WINDS

5 x 3 m

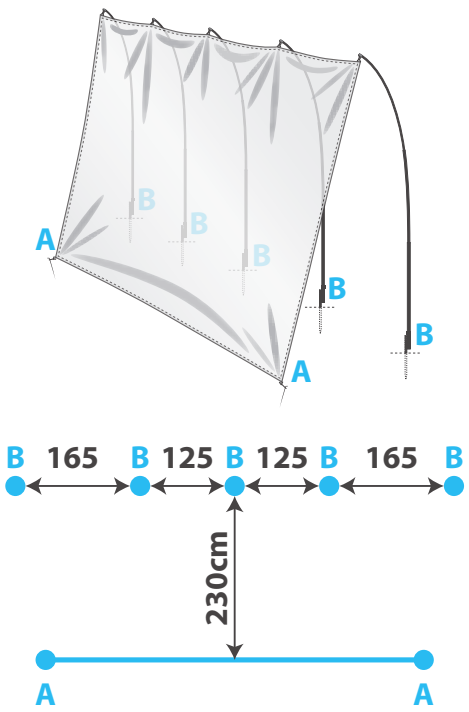

3 x 3 m

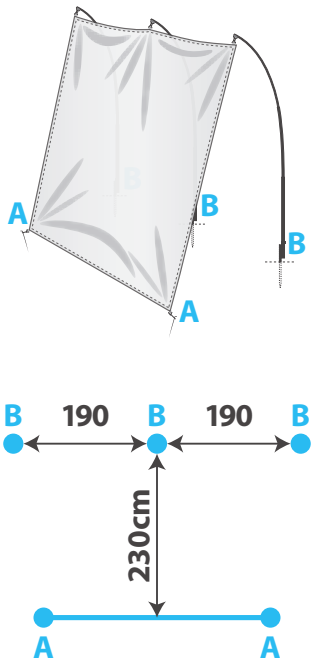

3 x 4 m

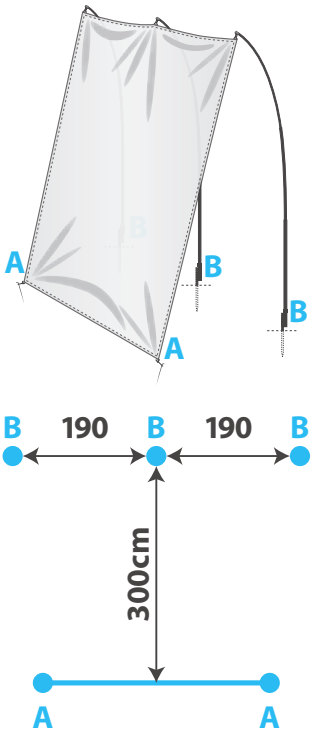

4 x 3 m

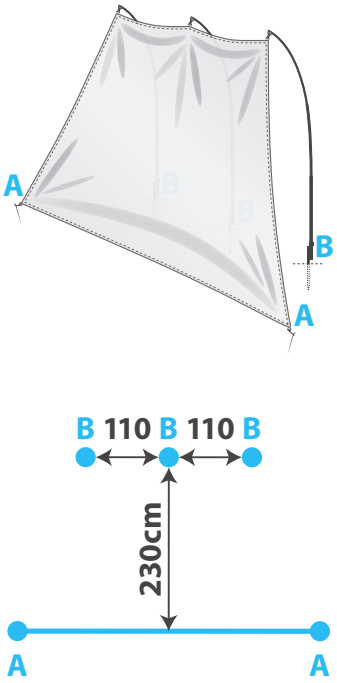

3 x 4 m

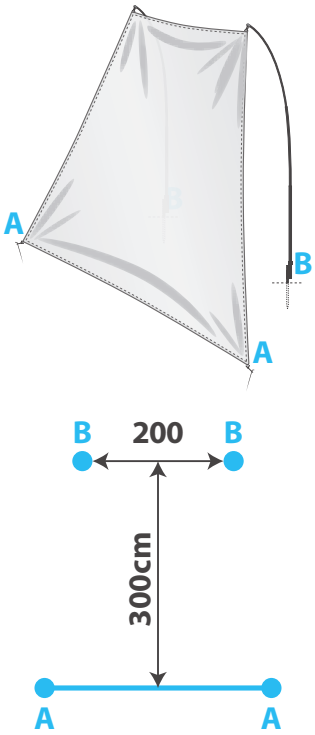
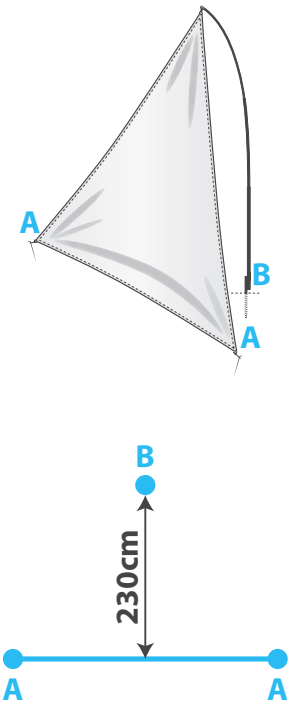
3,5 x 3 m